


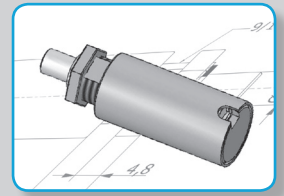


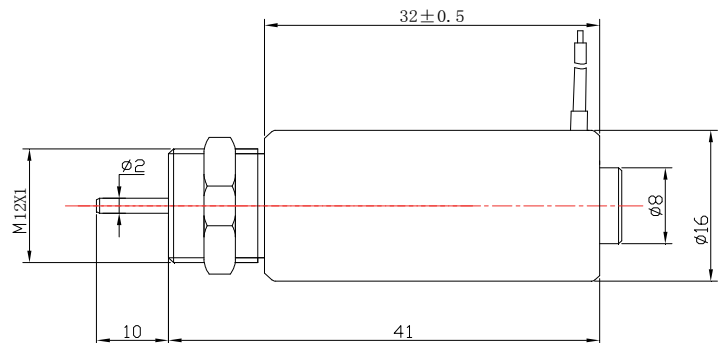

**SOLENOID**  
Cylinder

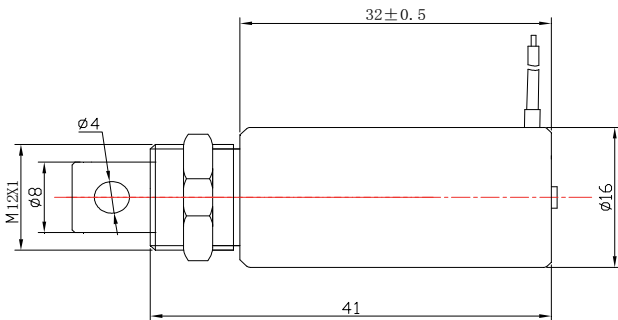

Item No.						
<input type="text" value="3"/>	<input type="text" value="3"/>	<input type="text"/>	<input type="text" value="1"/>	<input type="text"/>	<input type="text" value="4"/>	<input type="text" value="6"/>
1	2	3	4	5	6	7
Voltage:		<input type="text" value="2"/>				
6 VDC		<input type="text" value="3"/>				
12 VDC		<input type="text" value="4"/>				
24 VDC		<input type="text" value="5"/>				
48 VDC						
Application:						
pull		<input type="text" value="2"/>				
pull + spring		<input type="text" value="3"/>				
push		<input type="text" value="4"/>				
push + spring		<input type="text" value="5"/>				

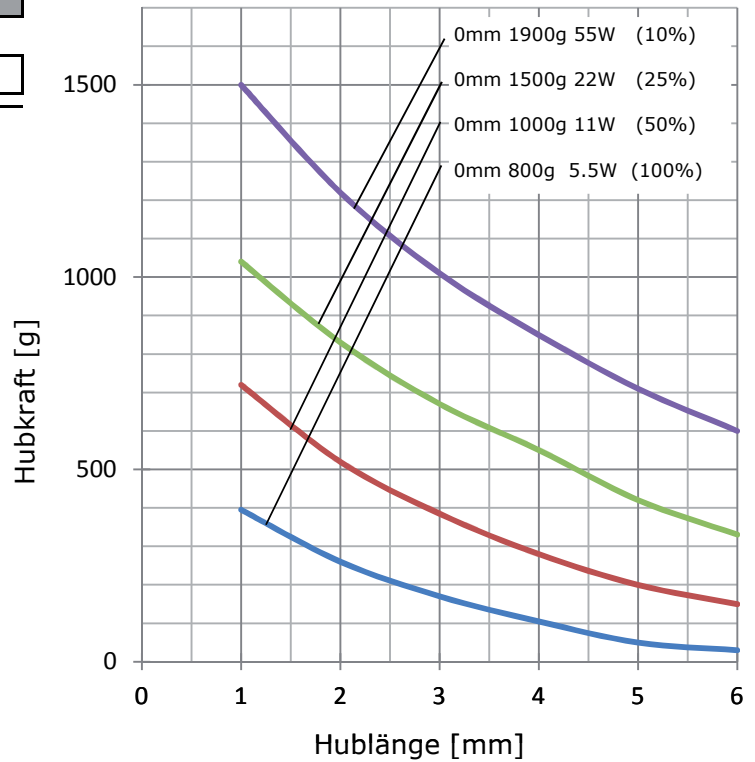

Data	ED = $\frac{\text{ON [sec]}}{\text{ON [sec] + OFF [sec]}} \times 100\%$ max. ON time [sec]	100%	50%	25%	10%
		continous	intermitted		
	at 20°C [W]	5,5	11	22	55
	at 20°C [mA]	738	1058	1476	2338
	Resistance [Ω]	Voltage [VDC]			
	5,14	6	8,5	12	19
	20,7	12	17	24	38
	83,5	24	33,9	48	75,9
	325	48	67,9	96	151,8