
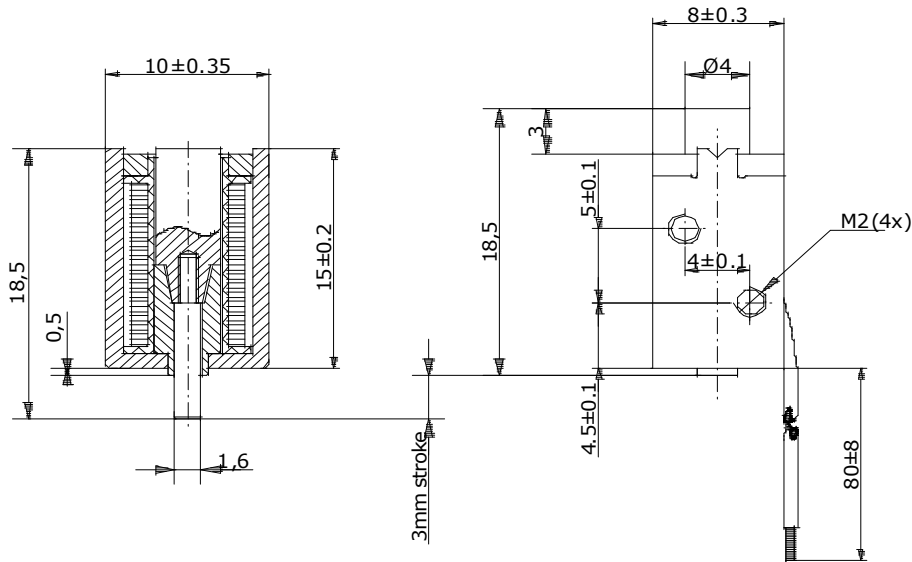


Item No.						
<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value=""/>	<input type="text" value="0"/>	<input type="text" value=""/>	<input type="text" value="4"/>	<input type="text" value="0"/>
1	2	3	4	5	6	7
Voltage:						
6 VDC	<input type="text" value="2"/>					
12 VDC	<input type="text" value="3"/>					
24 VDC	<input type="text" value="4"/>					
48 VDC	<input type="text" value="5"/>					
Application:						
pull		<input type="text" value="2"/>				
pull + spring		<input type="text" value="3"/>				
push		<input type="text" value="4"/>				
push + spring		<input type="text" value="5"/>				

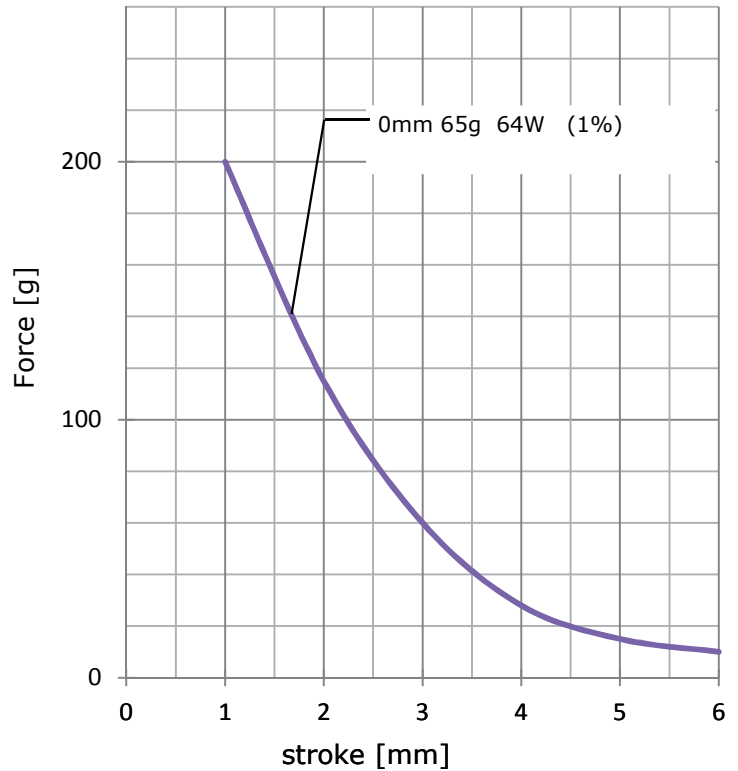

Data	$ED = \frac{ON [sec]}{ON [sec] + OFF [sec]} \times 100\%$	1%
	max. ON time [sec]	intermitted
	at 20°C [W]	1%
	at 20°C [A]	64
	Resistance [Ω]	4,92
	2,64	Voltage [VDC]