




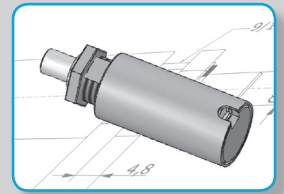

SOLENOID
Cylinder

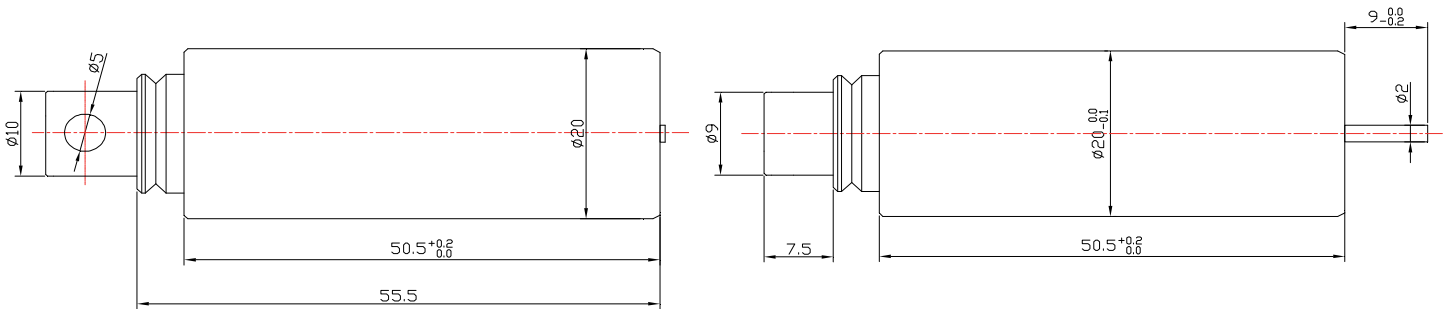

Item No.						
<input type="text" value="3"/>	<input type="text" value="3"/>	<input type="text"/>	<input type="text" value="2"/>	<input type="text"/>	<input type="text" value="4"/>	<input type="text" value="3"/>
1	2	3	4	5	6	7
Voltage:		<input type="text" value="2"/>				
6 VDC		<input type="text" value="3"/>				
12 VDC		<input type="text" value="4"/>				
24 VDC		<input type="text" value="5"/>				
48 VDC						
Application:			<input type="text" value="2"/>			
pull			<input type="text" value="3"/>			
pull + spring			<input type="text" value="4"/>			
push			<input type="text" value="5"/>			
push + spring						

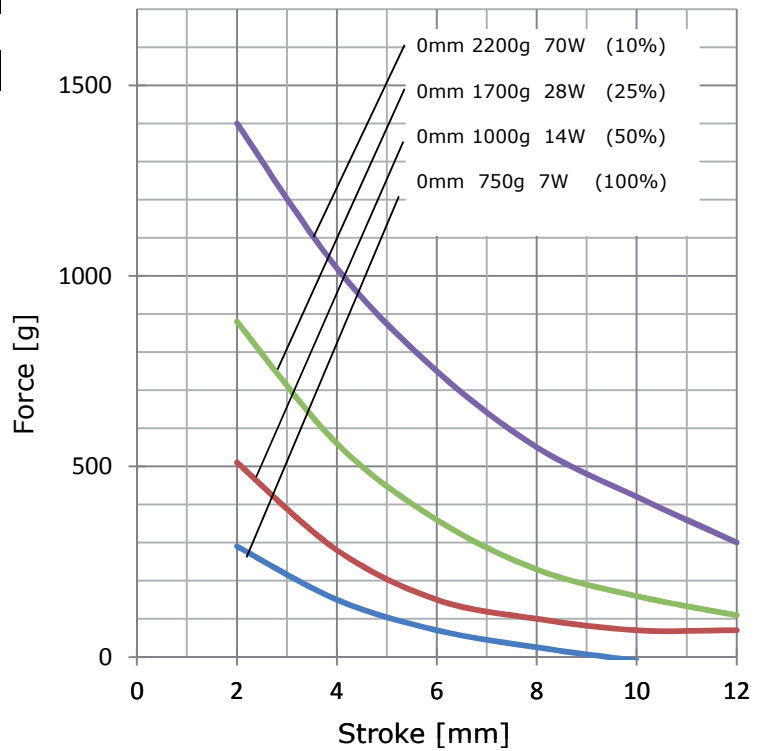

Data	ED = $\frac{\text{ON [sec]}}{\text{ON [sec] + OFF [sec]}} \times 100\%$	100%	50%	25%	10%
		continous	intermitted		
max. ON time [sec]		∞	230	25	6
at 20°C [W]		7	14	28	70
at 20°C [mA]		855	1200	1700	2700
Resistance [Ω]		Voltage [VDC]			
5,2		6	8,5	12	19
20,5		12	17	24	38
83		24	33,9	48	76
331		48	68	96	152