
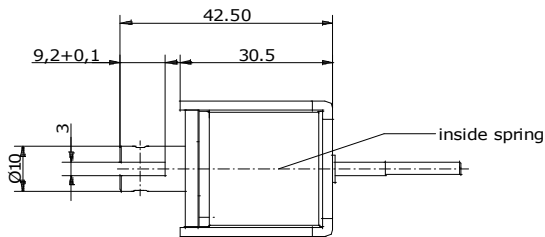
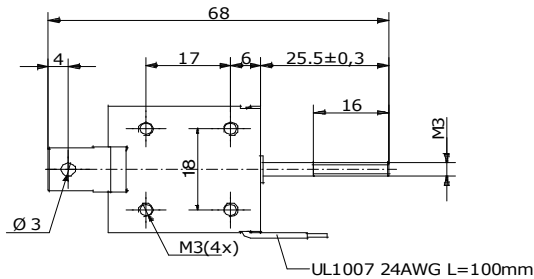



Item No.						
<b>3</b>	<b>2</b>		<b>2</b>		<b>4</b>	<b>2</b>
1	2	3	4	5	6	7
<b>Voltage:</b>						
6 VDC		<b>2</b>				
12 VDC		<b>3</b>				
24 VDC		<b>4</b>				
48 VDC		<b>5</b>				
<b>Application:</b>						
pull				<b>2</b>		
pull + spring				<b>3</b>		
push				<b>4</b>		
push + spring				<b>5</b>		

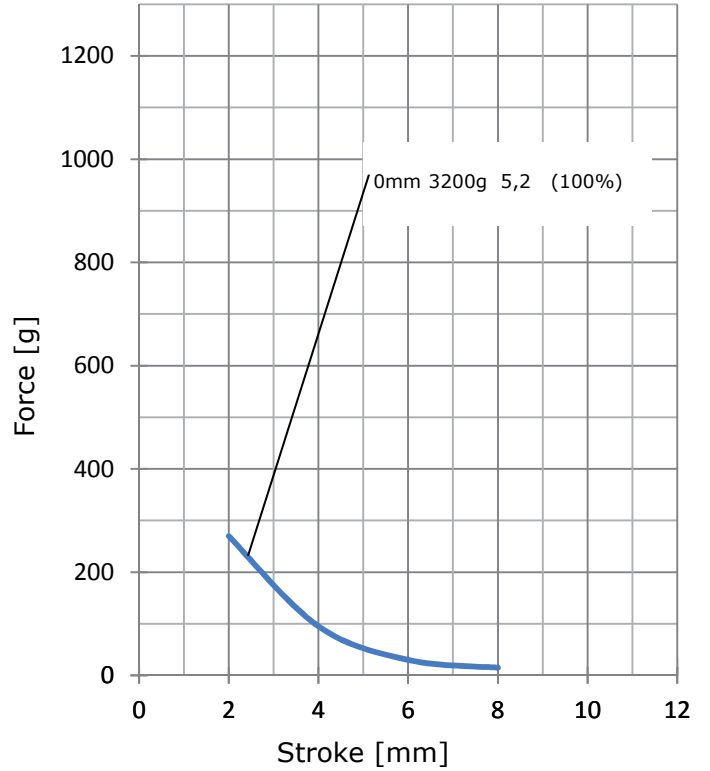

<b>Data</b>	$ED = \frac{ON [sec]}{ON [sec] + OFF [sec]} \times 100\%$	100%
	max. ON time [sec]	∞
	at 20°C [W]	5,2
	at 20°C [mA]	866
	Resistance [Ω]	Voltage [VDC]
	6,92	6
	13,86	12
27,7	24	