
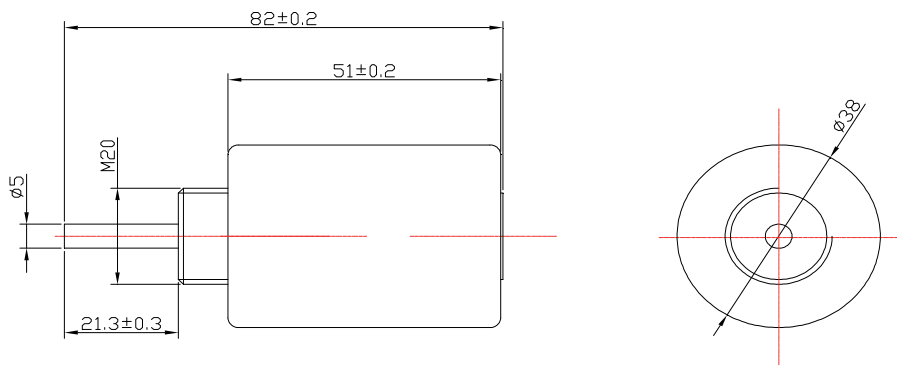


Item No.						
<input type="text" value="3"/>	<input type="text" value="3"/>	<input type="text"/>	<input type="text" value="3"/>	<input type="text"/>	<input type="text" value="4"/>	<input type="text" value="2"/>
1	2	3	4	5	6	7
Voltage:						
6 VDC	<input type="text" value="2"/>					
12 VDC	<input type="text" value="3"/>					
24 VDC	<input type="text" value="4"/>					
48 VDC	<input type="text" value="5"/>					
Application:						
pull		<input type="text" value="2"/>				
pull + spring		<input type="text" value="3"/>				
push		<input type="text" value="4"/>				
push + spring		<input type="text" value="5"/>				

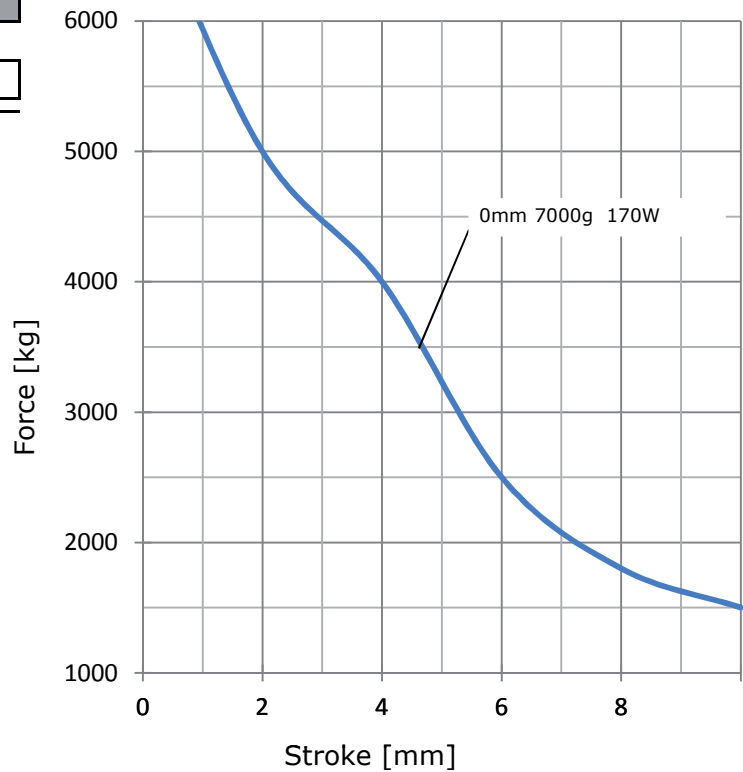

Data	ED = $\frac{\text{ON [sec]}}{\text{ON [sec] + OFF [sec]}} \times 100\%$	100%	50%	25%	10%
		continuous	intermitted		
	max. ON time [sec]	∞	70	41	18
	at 20°C [W]	17	34	68	170
	at 20°C [mA]	1800	2546	3600	5692
	Resistance [Ω]	Voltage [VDC]			
	24	19,9	28	40	63